





SUSTAINABLE COLD SOLUTIONS

TRANSCRITICAL CO₂ CONDENSING UNITS



We know the art of achieving
a perfect temperature

BEIJER REF

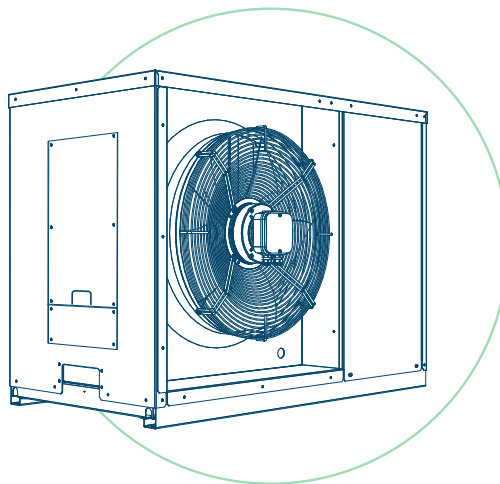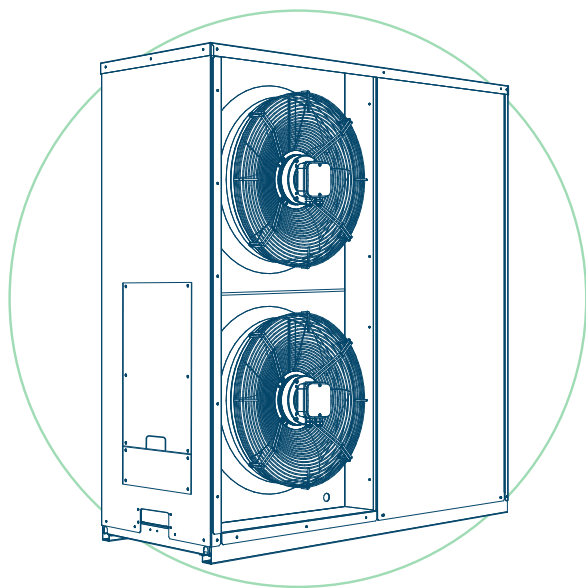

Product Description

Condensing unit for transcritical CO₂ applications equipped with TOSHIBA BLDC compressor(s) with inverter, integrated gas cooler and EC fans. This is a high-efficiency solution designed to ensure a small footprint and low noise.

MAIN ADVANTAGES



CO₂ REFRIGERANT



EFFICIENT SOLUTION



LOW NOISE



SMALL FOOTPRINT



EASY START-UP



DC BRUSHLESS ROTARY COMPRESSOR



GAS COOLER EQUIPPED

Cooling Capacity

Transcritical Condensing Units DX

UMT T MTDX



UMT T BTDX




Standard Accessories

- Toshiba BLDC compressors
- Carel controller
- Inverter modulation for capacity control 25-100%
- Integrated gas cooler with EC fan
- Design pressure 130 bar (high pressure side) 80 bar (liquid line) 80 bar (suction line)
- Liquid receiver 8 liter on models 030 -045 MTDX and N45 and N67BTDX; 12 liters for models 067-100 MTDX and 067 -100 BTDX
- K65 connections

Accessories on Request

- Low noise frame (day operation 33 dB(A) @10m; night operation 30 dB(A))
- Oil management (oil separator + reservoir, oil level control, oil return solenoid valve)
- Winter kit (suggested for ambient temperature <-20°C)
- Epoxy or Electrofin gas cooler corrosion coil protection.
- Adiabatic Kit water spray, including controller

Check the Unit CO₂ Charge



Cooling Capacity:

MT from 0,6 kW up to 8,5 kW
BT from 0,65 kW up to 7,9 kW

CUBO₂ Smart is an high efficiency condensing unit (for CO₂ transcritical application) equipped with BLDC variable speed compressor.

It is compact, easy to install and can directly communicate with the refrigerated units.

Thanks to these features it is a very efficient (even at partial load) without any compromise with the food conservation.

DOWNLOAD BROCHURE

CO₂ CHARGE CALCULATION
V4.0



1_ Enter our website www.scmfrigo.com

2_ Click on the 'Products' section at the top

3_ Click within the product group 'CO₂ Condensing Units'.

4_ Finally, click here!



English



user External

Air > CO₂ condensing units for medium temperature applications

Configuration • Selection • Verify

Serie
Serie Cubo2Smart

Options
Compressor brand Toshiba BLDC



Input data

Required Capacity

Selection

kW

0,00

Tolerance

%

10,00

Evaporation temperature

°C

-5,00

Ambient temperature

°C

35,00

<https://cubo2calculation.scmfrigo.com/#/home>

AT THE FOLLOWING LINK YOU CAN CHECK THE UNIT CHARGE.
Ask our sales department for the password

Ambient Temperature [°C]		Evaporation Temperature[°C]											
		-35			-30			-25			-20		
		Capacity [W]		COP	Capacity [W]		COP	Capacity [W]		COP	Capacity [W]		COP
		min	max		min	max		min	max		min	max	
UMT T N45 BTDX	40	694	1915	1,19	836	2299	1,38	975	2668	1,55	1148	3110	1,77
	38	709	1933	1,22	857	2318	1,42	1002	2687	1,60	1181	3129	1,83
	32	761	2004	1,38	926	2393	1,60	1090	2764	1,81	1288	3204	2,07
	25	815	2084	1,57	995	2477	1,83	1174	2850	2,07	1389	3289	2,38
	15	867	2163	1,81	1058	2561	2,10	1250	2935	2,39	1479	3373	2,76
	5	948	2277	2,24	1155	2684	2,63	1368	3061	3,02	1615	3497	3,53
Liquid receiver volume		8 liters			MEPS ^(d)			2,39					
Weight		176 kg			Annual Energy Consumption			8767 kWh/year					
Connections		Liquid / suction 1/2"			Power Supply			230 V / 1+N+PE / 50 Hz					
Sound pressure ^(b)		day / night 40 / 37 dB(A)											

Ambient Temperature [°C]		Evaporation Temperature[°C]											
		-35			-30			-25			-20		
		Capacity [W]		COP	Capacity [W]		COP	Capacity [W]		COP	Capacity [W]		COP
		min	max		min	max		min	max		min	max	
UMT T N67 BTDX	40	1125	3058	1,28	1366	3645	1,47	1601	4192	1,63	1871	4807	1,82
	38	1140	3074	1,32	1382	3668	1,51	1617	4221	1,69	1886	4843	1,89
	32	1196	3146	1,47	1440	3759	1,70	1675	4333	1,91	1943	4976	2,15
	25	1253	3234	1,68	1501	3865	1,95	1738	4457	2,20	2005	5117	2,49
	15	1308	3326	1,93	1560	3971	2,25	1799	4578	2,55	2067	5254	2,91
	5	1385	3458	2,41	1648	4126	2,85	1895	4755	3,27	2166	5455	3,79
Liquid receiver volume		8 liters			MEPS ^(c)			2,39					
Weight		176 kg			Annual Energy Consumption			13282 kWh/year					
Connections		Liquid / suction 1/2"			Power Supply			230 V / 1+N+PE / 50 Hz					
Sound pressure ^(b)		day / night 40 / 37 dB(A)											

Ambient Temperature [°C]		Evaporation Temperature[°C]											
		-35			-30			-25			-20		
		Capacity [W]		COP	Capacity [W]		COP	Capacity [W]		COP	Capacity [W]		COP
		min	max		min	max		min	max		min	max	
UMT T 067 BTDX	40	950	4380	0,88	1190	5320	1,07	1360	6030	1,15	1660	7210	1,41
	38	950	4380	0,91	1190	5320	1,14	1360	6030	1,18	1660	7210	1,50
	32	950	4380	1,09	1190	5320	1,20	1360	6030	1,37	1660	7210	1,57
	25	950	4380	1,22	1190	5320	1,35	1360	6030	1,54	1660	7210	1,69
	15	950	4380	1,70	1190	5320	1,90	1360	6030	2,15	1660	7210	2,37
	5	950	4380	1,97	1190	5320	2,23	1360	6030	2,41	1660	7210	2,68
Liquid receiver volume	12 liters	MEPS ^(d)				2,39							
Weight	195 kg	Annual Energy Consumption				19367 kWh/year							
Connections	Liquid / suction 1/2"	Power Supply				400 V / 3+N+PE / 50 Hz							
Sound pressure ^(b)	day / night 41 / 38 dB(A)												

Ambient Temperature [°C]		Evaporation Temperature[°C]											
		-35			-30			-25			-20		
		Capacity [W]		COP	Capacity [W]		COP	Capacity [W]		COP	Capacity [W]		COP
		min	max		min	max		min	max		min	max	
UMT T 100 BTDX	40	1520	6540	0,91	1890	7900	1,09	2140	8940	1,15	2600	10650	1,41
	38	1520	6540	0,96	1890	7900	1,16	2140	8940	1,18	2600	10650	1,51
	32	1520	6540	1,18	1890	7900	1,27	2140	8940	1,43	2600	10650	1,58
	25	1520	6540	1,33	1890	7900	1,44	2140	8940	1,62	2600	10650	1,74
	15	1520	6540	1,93	1890	7900	2,11	2140	8940	2,35	2600	10650	2,54
	5	1520	6540	2,27	1890	7900	2,54	2140	8940	2,69	2600	10650	2,93
Liquid receiver volume		12 liters			MEPS ^(c)			2,39					
Weight		195 kg			Annual Energy Consumption			28623 kWh/year					
Connections		Liquid / suction 5/8"			Power Supply			400 V / 3+N+PE / 50 Hz					
Sound pressure ^(b)		day / night 42 / 39 dB(A)											

NOTES

^(a) Interstage SST variable from -5 °C to 0°C according to operating conditions. Inverter modulation from 25 - 100%, corresponding to 1500-6000 rpm

^(b) based on free field area weed semi-spherical sound emission in 10m distance; tolerance ± 2 dB(A)

^(c) Minimum Energy Performance Standards, calculated according to Ecodesign Directive EN 2009/125/EC


Evaporation Temperature[°C]																
UMT T 030 MTDX	Ambient Temperature [°C]	-15		COP	-10		COP	-5		COP	0		COP	5		COP
		Capacity [W]			Capacity [W]			Capacity [W]			Capacity [W]			Capacity [W]		
		min	max	min	max	min	max	min	max	min	max	min	max			
	40	429	2140	1,38	523	2507	1,58	575	2759	1,59	674	3143	1,79	787	3541	2,04
	38	440	2165	1,44	526	2514	1,59	622	2889	1,80	727	3283	2,04	850	3704	2,31
	32	455	2181	1,54	551	2548	1,76	653	2939	2,02	768	3362	2,32	905	3826	2,68
	25	506	2350	1,81	613	2752	2,09	728	3197	2,43	852	3678	2,83	988	4188	3,33
	15	682	3033	3,16	816	3577	3,76	971	4185	4,56	1153	4859	5,64	1364	5598	7,18
	5	814	3564	4,63	973	4194	5,70	1161	4899	7,20	1270	5290	7,25	1364	5598	7,18
	Liquid receiver volume	8 liters						MEPS ^(c)				3,41				
	Weight	165 kg						Annual Energy Consumption				4590 kWh/year				
	Connections	Liquid / suction 1/2"						Power Supply				230 V / 1+N+PE / 50 Hz				
	Sound pressure ^(b)	day / night 40 / 37 dB(A)														
Evaporation Temperature[°C]																
UMT T 045 MTDX	Ambient Temperature [°C]	-15		COP	-10		COP	-5		COP	0		COP	5		COP
		Capacity [W]			Capacity [W]			Capacity [W]			Capacity [W]			Capacity [W]		
		min	max	min	max	min	max	min	max	min	max	min	max			
	40	648	3233	1,38	789	3785	1,58	868	4165	1,59	1018	4746	1,79	1188	5346	2,01
	38	665	3270	1,46	794	3796	1,59	939	4362	1,80	1098	4957	2,04	1283	5593	2,31
	32	686	3293	1,54	832	3847	1,76	986	4437	2,02	1160	5077	2,32	1366	5778	2,68
	25	755	3541	1,81	915	4142	2,09	1085	4809	2,43	1270	5529	2,83	1474	6293	3,33
	15	1021	4571	3,14	1221	5384	3,76	1452	6295	5,64	1722	7305	5,64	2039	8412	7,17
	5	1220	5370	4,64	1457	6314	5,71	1737	7369	7,25	1899	7953	7,25	2039	8412	7,17
	Liquid receiver volume	8 liters						MEPS ^(c)				3,41				
	Weight	165 kg						Annual Energy Consumption				4590 kWh/year				
	Connections	Liquid / suction 1/2"						Power Supply				230 V / 1+N+PE / 50 Hz				
	Sound pressure ^(b)	day / night 40 / 37 dB(A)														
Evaporation Temperature[°C]																
UMT T 067 MTDX	Ambient Temperature [°C]	-15		COP	-10		COP	-5		COP	0		COP	5		COP
		Capacity [W]			Capacity [W]			Capacity [W]			Capacity [W]			Capacity [W]		
		min	max	min	max	min	max	min	max	min	max	min	max			
	40	1038	4753	1,40	930	5489	1,57	1459	6296	1,75	1380	7159	1,96	1600	6790	2,18
	38	1061	4755	1,45	955	5504	1,63	1485	6325	1,83	1414	6856	2,05	1681	7820	2,29
	32	1094	4722	1,57	1086	5508	1,79	1320	6385	2,04	1580	7328	2,31	1866	8383	2,51
	25	1001	4904	1,69	1221	5790	1,99	1470	6764	2,34	1748	7820	2,76	2053	8951	3,34
	15	1479	6466	3,02	1779	7638	3,63	2121	8969	4,40	2509	10470	4,25	2945	12149	6,88
	5	1825	7592	4,44	2175	8943	5,40	2356	10491	6,68	2777	11411	6,81	2945	12149	6,88
	Liquid receiver volume	12 liters						MEPS ^(c)				3,28				
	Weight	165 kg						Annual Energy Consumption				10324 kWh/year				
	Connections	Liquid / suction 1/2"						Power Supply				230 V / 1+N+PE / 50 Hz				
	Sound pressure ^(b)	day / night 41 / 38 dB(A)														
Evaporation Temperature[°C]																
UMT T 100 MTDX	Ambient Temperature [°C]	-15		COP	-10		COP	-5		COP	0		COP	5		COP
		Capacity [W]			Capacity [W]			Capacity [W]			Capacity [W]			Capacity [W]		
		min	max	min	max	min	max	min	max	min	max	min	max			
	40	1549	7904	1,56	1854	8193	1,57	2028	9113	1,57	2365	10366	1,75	2719	11672	1,94
	38	1583	7098	1,45	1864	8202	1,58	2188	9411	1,77	2534	10704	1,98	2890	12034	2,18
	32	1550	7047	1,53	1750	8325	1,73	2273	9491	1,97	2644	10866	2,25	3048	12314	2,52
	25	1597	7503	1,76	1929	8812	2,04	2324	10232	2,35	2744	11750	2,71	3182	13355	3,12
	15	2252	9791	3,04	2725	11455	3,60	3250	13414	4,29	3824	15611	5,16	4443	18053	6,26
	5	2749	11392	4,44	3282	13421	5,36	3874	15738	6,57	4195	17042	6,48	4443	18053	6,26
	Liquid receiver volume	12 liters						MEPS ^(c)				3,27				
	Weight	165 kg						Annual Energy Consumption				15634 kWh/year				
	Connections	Liquid / suction 5/8"						Power Supply				400 V / 3+N+PE / 50 Hz				
	Sound pressure ^(b)	day / night 42 / 39 dB(A)														

NOTES


^(a) Interstage SST variable from -5 °C to 0°C according to operating conditions. Inverter modulation from 25 - 100%, corresponding to 1500-6000 rpm^(b) based on free field area weed semi-spherical sound emission in 10m distance; tolerance ± 2 dB(A)^(c) Minimum Energy Performance Standards, calculated according to Ecodesign Directive EN 2009/125/EC

Dimensional Data

BTDX - MTDX Standard

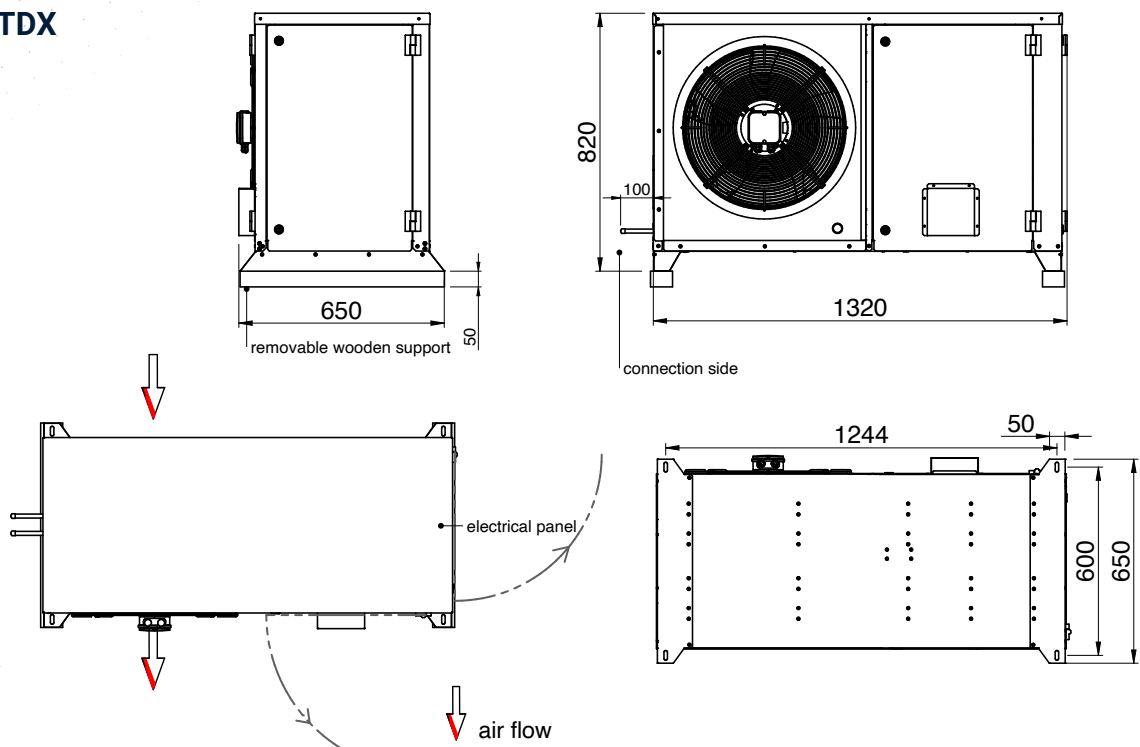


BTDX - MTDX Low Noise

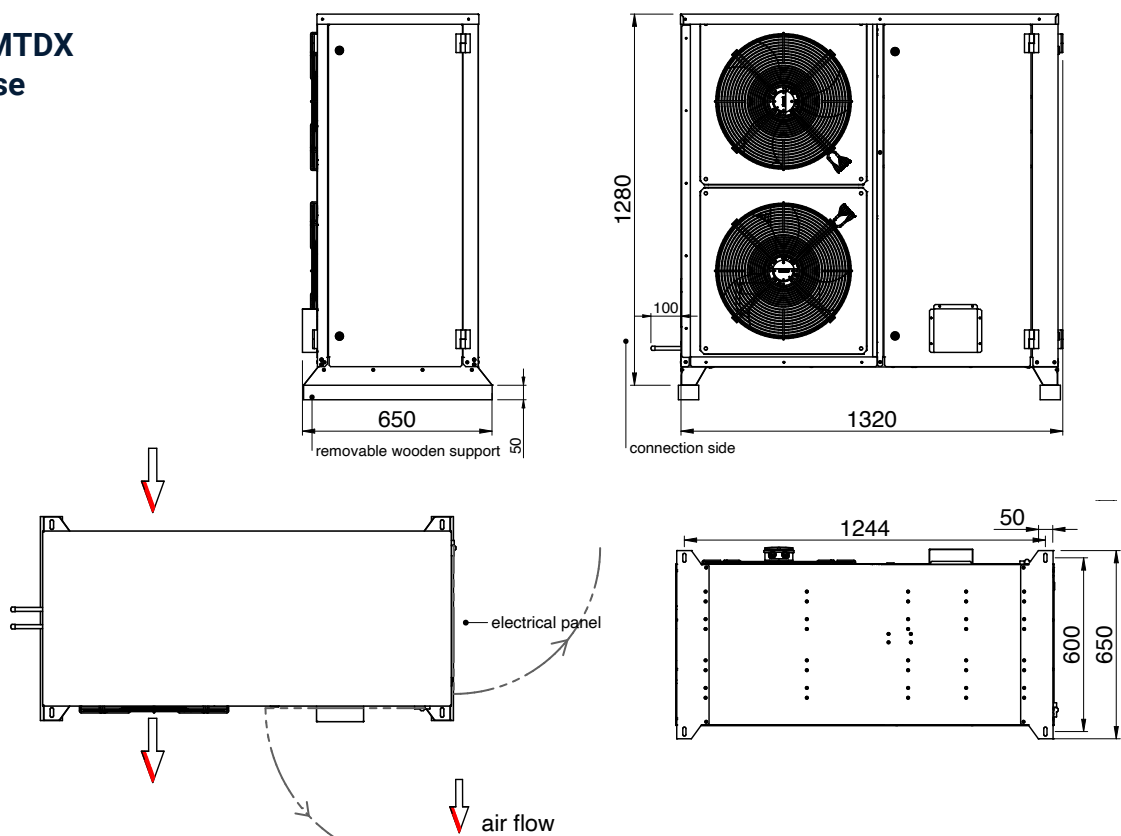


Unit Configuration


MODEL UMT T BTDX - 2 COMPRESSORS

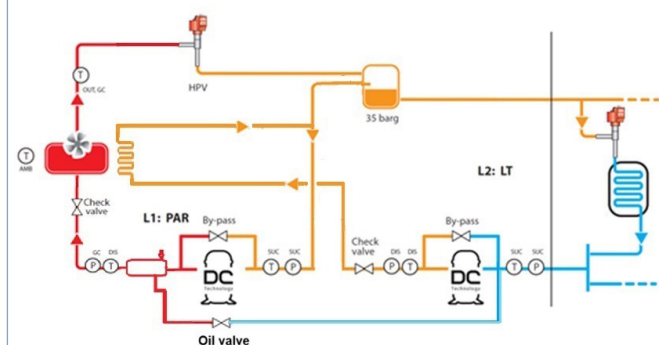

**MODEL UMT T BTDX
2 - STAGE COMPRESSOR**

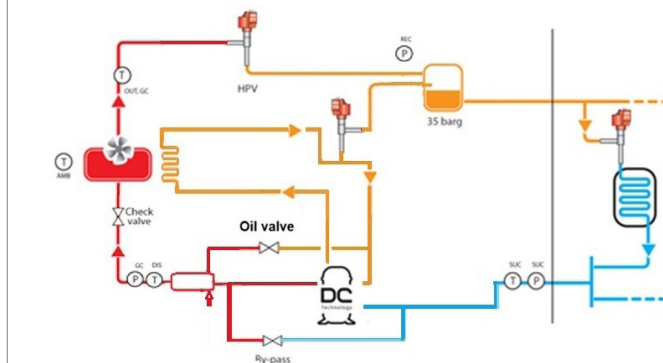


MODEL UMT T MTDX

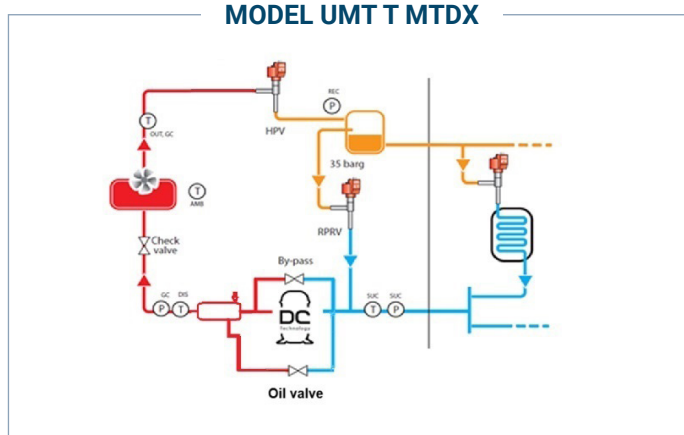

Installation Design

Multi-Split

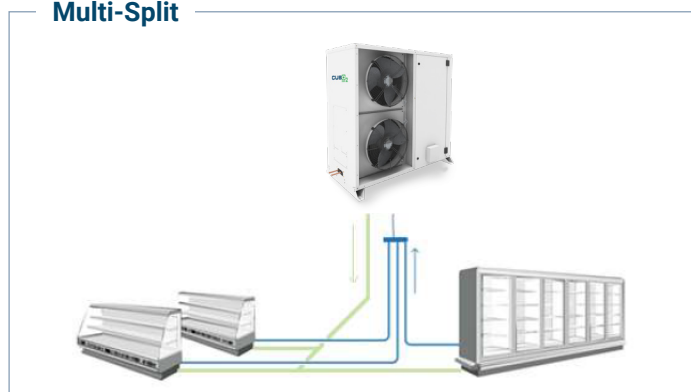

Branch



Pipe Connections (Multi-Split or Branch)


The connection between the Condensing Unit and more remote evaporators can be the same one used for Multi-Split or branch system.

The preferred one is the one is able to guarantee the highest gas velocity in the suction line (for a good oil return) with a low pressure drop.

For Multi-Split layout, the system requires a dedicated suction line for each evaporator that will be collected by a manifold installed close to the condensing unit.

Please refer to the example reported in the pictures.

- Liquid line must be properly sized to supply the farther evaporators (liquid velocity < 1 m/s is suggested).
- Suction line must be properly sized to have a good oil return with a low pressure drop (gas velocity min 5m/s).

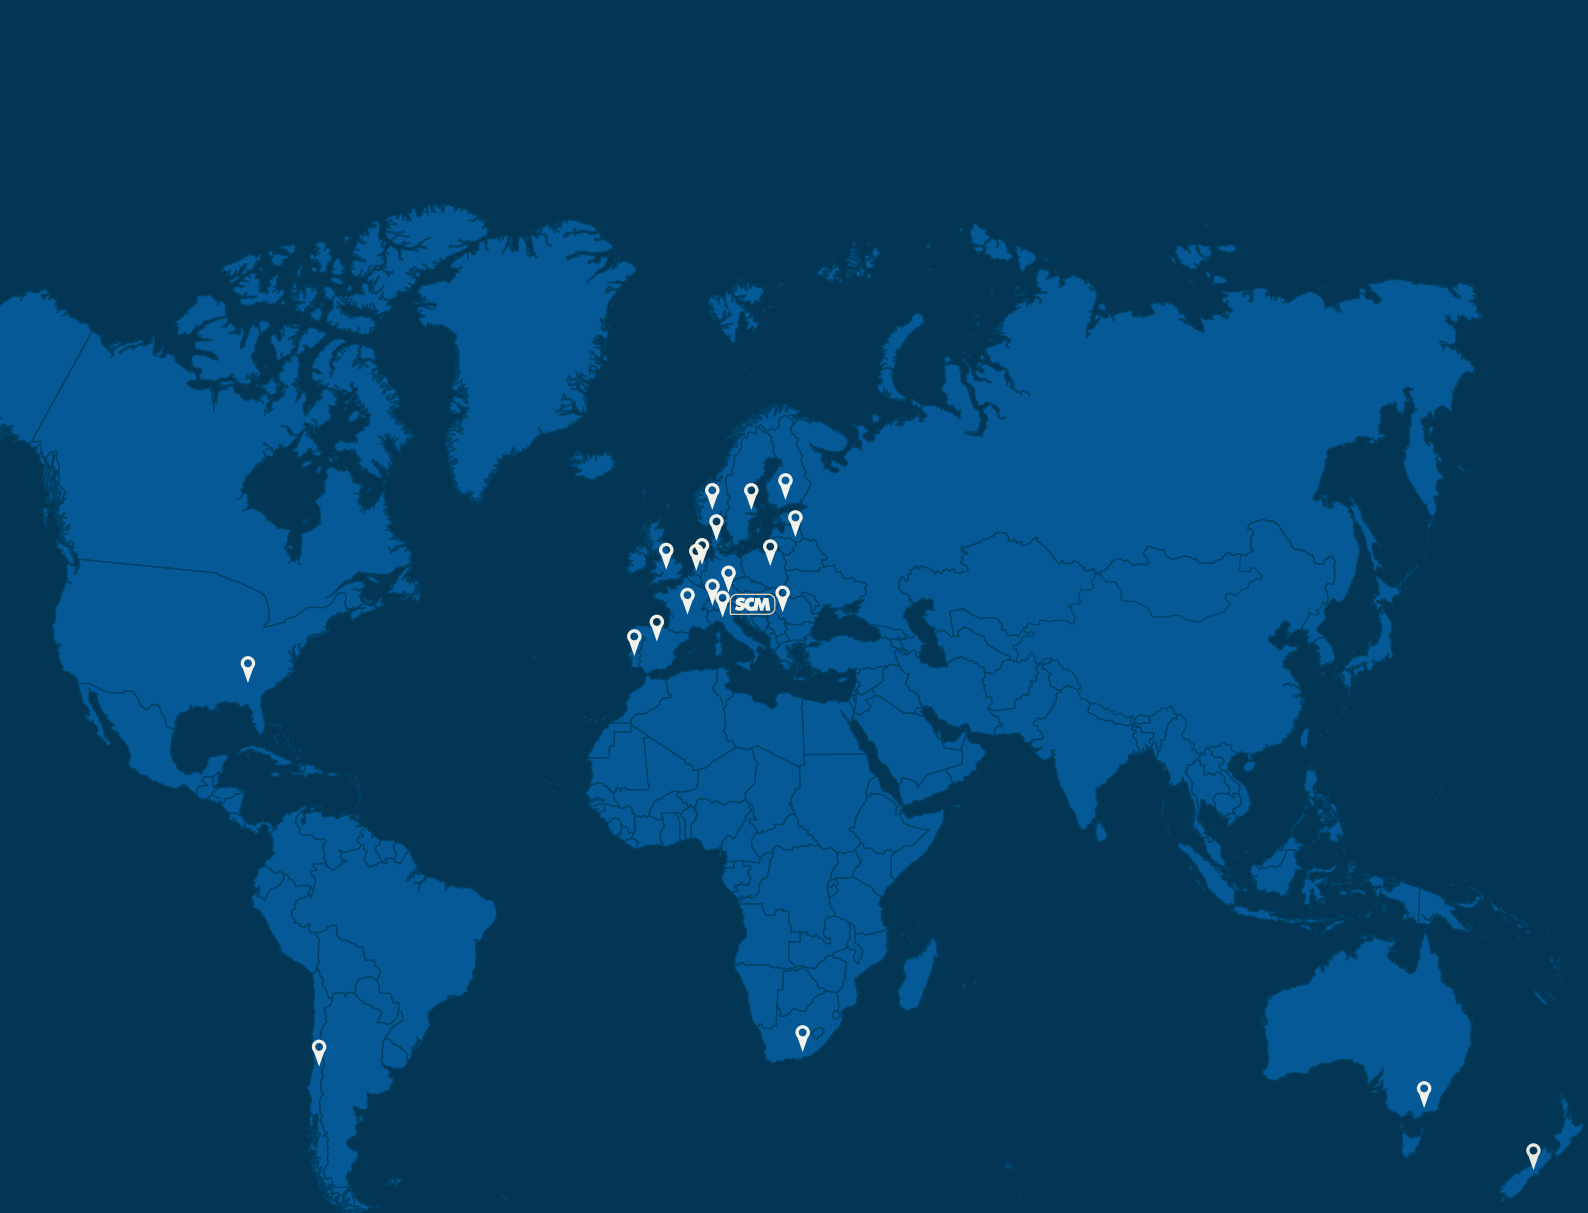

Stay connected.

Follow our LinkedIn page to discover more stories from our team and insights into what makes SCM Frigo a leader in innovation and sustainability.



Connect with Us
on LinkedIn

 www.scmfrigo.com  +39 049 970 5000  info@scmfrigo.com



A **BEIJER REF** Company

SCM FRIGO S.p.A. - Viale Andrea Palladio, 31 35020 Sant'Angelo di Piove di Sacco

